
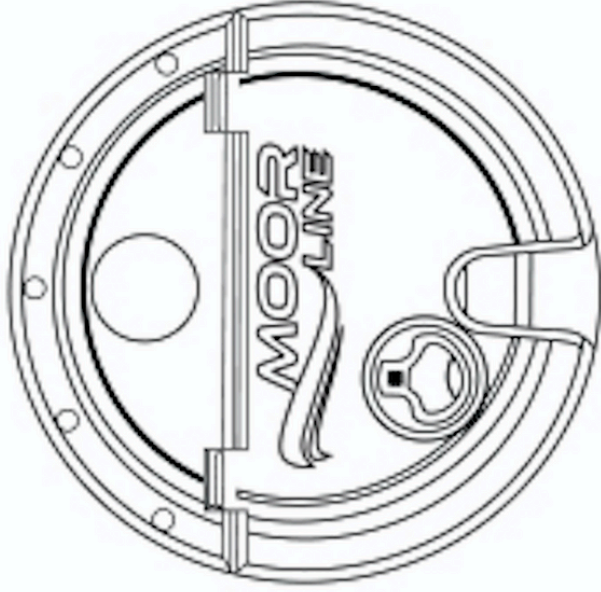


Specs and Dimensions

PRODUCT DIMENSIONS

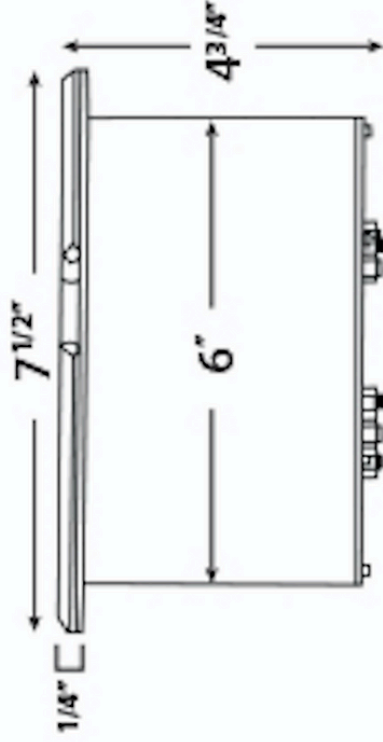

SPECS

1. 1/2" or 12.71 mm diameter double braid nylon line
2. 10 ft or 3+ meters of line.
3. 6061-T6 aluminum with an anodized coating.
4. Lockable latch to prevent theft of the line and/or device.
5. 304 and 316 stainless steel latch, bearings, and spring.
6. Blue solar LED light for night function.
7. Comes with an eye-loop or snap hook at the end of the line for easy mooring.
8. 6" or 152.4 mm diameter, 4.75" or 120.65 mm deep.
9. "Tide Adjuster switch" allows the boat to raise and lower with the tide or the rough marine conditions.
10. Each retail box comes with 3 different installations options.
 - Flush Mount
 - Round Pilings
 - 2.5" x 2.5" Square Steel Tubing
11. Comes with cutting template for easy flush mount installation.
12. LDPE UV Stabilized covered cap prevents debris from entering the canister, all while preserving the lid's coating and battery life on the light.