




# Operational Instructions




1

Lift up on the latch to open the lid.

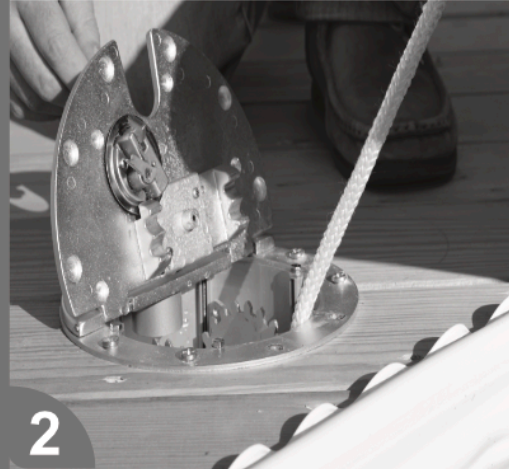



2

Pull out the necessary amount of line to reach and moor the boat.

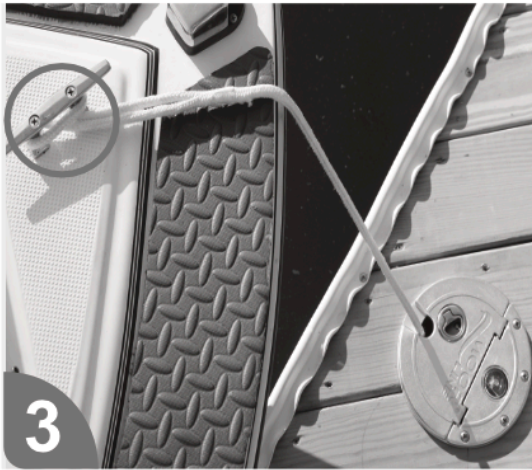

3

Whether using the *EYE* or the *SNAPHOOK*, simply attach the line to your boat.

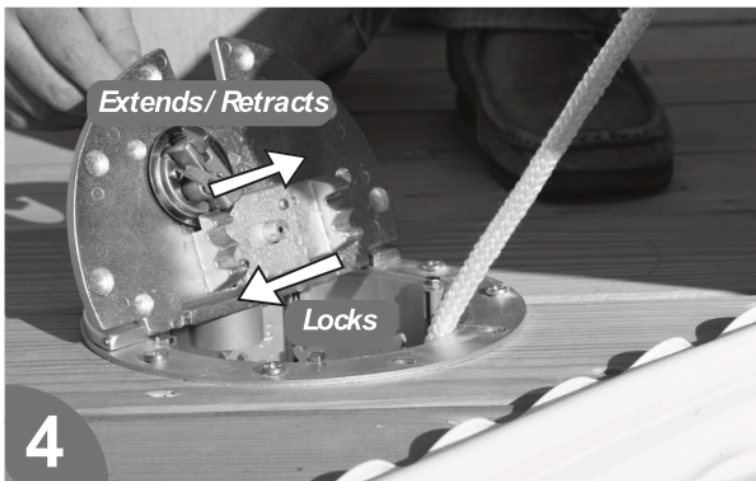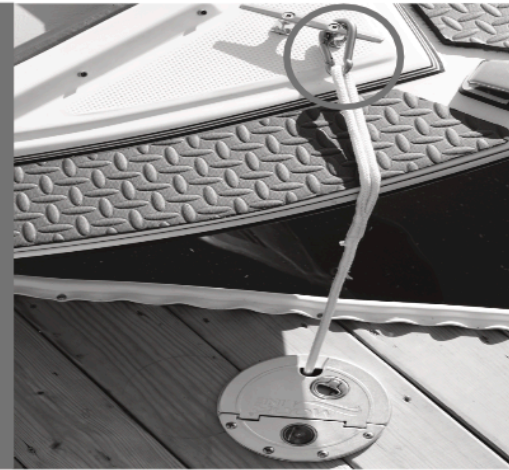


4

With the line attached securely to the boat, you can push the *Tidal Adjustment Switch* to the left with your index finger. This will ensure that the spool system will lock into place when the lid is shut, securing the line in a fixed position. Pushing the switch to the right allows the line to extend and retract freely for rough or tidal conditions when the lid is shut.


When you'd like to leave the dock, simply untie the line from your boat and lift the lid to automatically retract the line back into the device.

## How To Change Out The Line

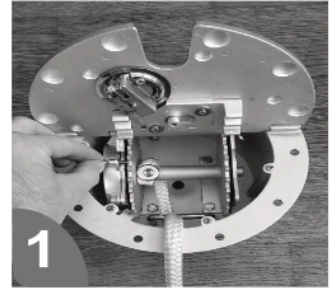


1

Pull the line all the way out and screw the set screw into the spool.

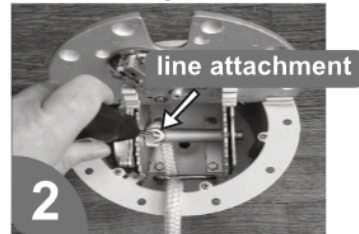


2

Unscrew the "line attachment."

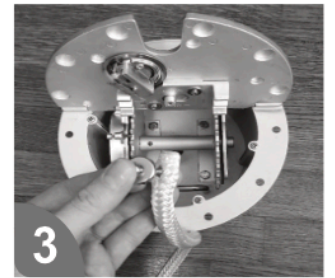


3

Screw the new mooring line into the "line attachment."

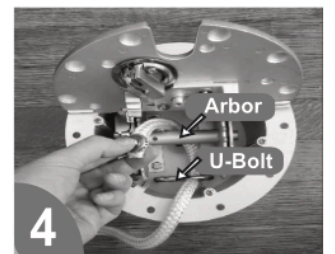

4

Tether the line back underneath the U-bolt, then the arbor and screw the line and "line attachment" into the arbor.

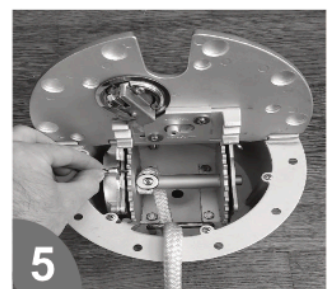

5

Unscrew the set screw to release the mooring line back into the canister.